


# 1x3 Single-Mode LGX Splitter

## Description:

FIBERONE® 1x3 coupler modules provide superior performance and value in a compact package. Designed for use in a variety of fiber distribution panels, each unit may be configured with a variety of adapter options. Requiring only a single slot, the FIBERONE 1x3 coupler module mounts easily and quickly with snap in connectors. Insertion loss, at both 1310 and 1550, is recorded and attached to each module for easy reference.

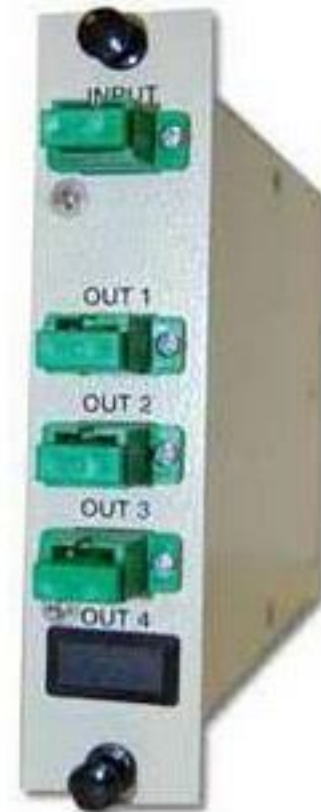

## Features:

- High Directivity
- Bi-Directional
- Low Insertion Loss
- Excellent Uniformity

## Specifications:

Dimensions	L: 5 in. x W: 1.13 in. x H: 5.2 in.
Wavelength	1310 & 1550 nm +/- 40
Reflectance	> - 55 dB
Uniformity	0.7 dB (Max)
Directivity	- 55 dB
PDL	0.2 dB
Temperature Coefficient	0.003 dB / °C
Operating Temperature	- 40 to + 65 °C
Insertion Loss (Max)	5.7