


## Bend Insensitive Patch Cords

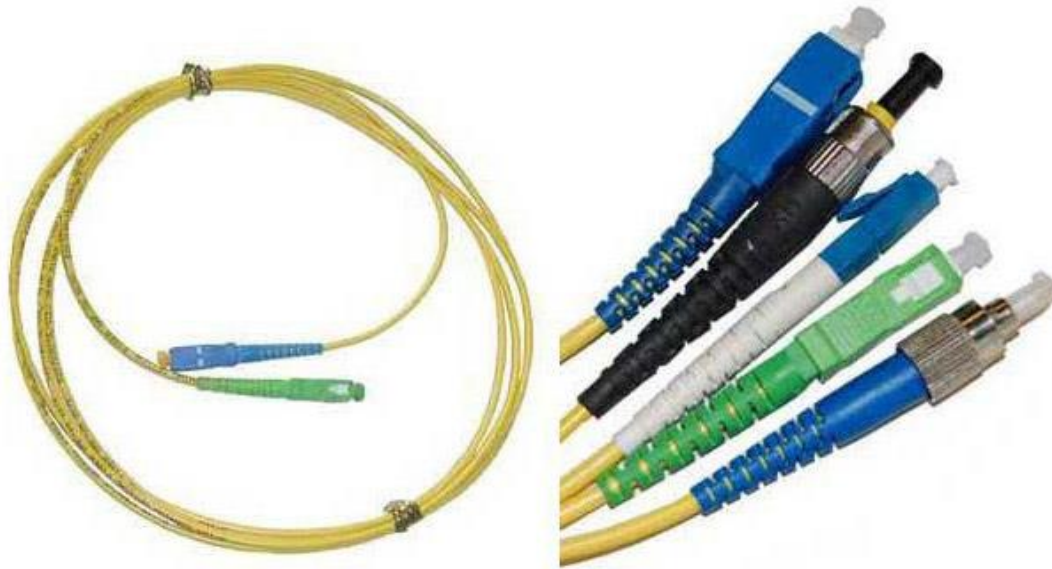

### Description:

FIBERONE® bend insensitive fiber optic patch cords are manufactured with high quality components to standard or custom lengths, colors, connector types and jacket thickness. Available in either a riser rated or fire-retardant plenum jacket with APC or UPC - SC, LC, FC or ST connectors. These patch cords are ideal for a wide range of applications such as, high bandwidth, long-distance telecommunications. FIBERONE finds it crucial to monitor quality by testing each patch cord to meet or exceed fiber optic industry standards.

### Features:

- Simplex or Duplex
- Standard or Custom Lengths
- Connector & PVC Jacket Options
- APC or UPC Polish
- Riser Rated or Plenum
- 100% Tested & Guaranteed

### Specifications:

| Connector Types       | SC  | LC                     | FC                     | ST                     |
|-----------------------|---|------------------------|------------------------|------------------------|
| Insertion Loss (dB)   | Max. 0.25<br>Typ. 0.15                      | Max. 0.25<br>Typ. 0.15 | Max. 0.25<br>Typ. 0.15 | Max. 0.25<br>Typ. 0.15 |
| Reflectance           |   |                        |                        |                        |
| APC Polish            | - 65 dB                                     | - 65 dB                | - 65 dB                | N/A                    |
| UPC Polish            | - 55 dB                                     | - 55 dB                | - 55 dB                | - 55 dB                |
| Fiber / Cable Type    | Corning® ClearCurve Fiber / Riser or Plenum |                        |                        |                        |
| PVC Jacket Thickness  | 1.6, 2 or 3 mm Diameter                     |                        |                        |                        |
| Operating Temperature | - 20 to 60 °C                               |                        |                        |                        |