


Multimode Patch Cords

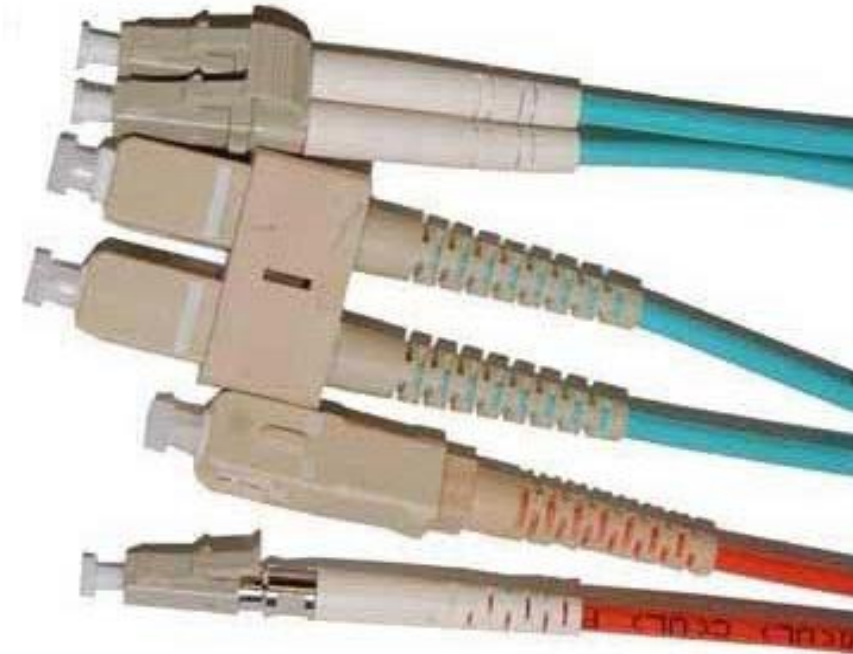

Description:

FIBERONE® multimode fiber optic patch cords are available in either a riser rated or fire-retardant plenum jacket, with a variety of UPC connector combinations. Various options of PVC jacket thickness, length and colors are also available. These patch cords are ideal for a wide range of applications such as, high bandwidth, long-distance telecommunications. FIBERONE guarantees reliability by individually hand testing each patch cord.

Features:

- Simplex or Duplex
- Standard or Custom Lengths
- Connector & PVC Jacket Options
- PC Polish
- Riser Rated or Plenum
- 100% Tested & Guaranteed

Specifications:

Connector Types	SC	LC	FC	ST
Insertion Loss (dB)	Max. 0.40	Max. 0.40	Max. 0.40	Max. 0.40
Reflectance – PC Polish	- 25 dB	- 25 dB	- 25 dB	- 25 dB
Fiber / Cable Type	Corning® InfiniCor Fiber / Riser or Plenum			
PVC Jacket Thickness	1.6, 2 or 3 mm Diameter			
Operating Temperature	- 20 to 60 °C			