


## OM1 Fiber Jumpers

### Description:

FIBERONE® OM1 fiber jumpers come simplex or duplex housing 62.5/125um Corning® InfiniCor fibers. Each is made to standard or custom with various options. Our jumpers are available in either a standard riser-rated or a fire-retardant jacket, at any length, with a 2.0mm or 3.0mm PVC jacket. FIBERONE offers a pre-terminating service based on your choice of SC, LC, FC and ST connectors. FIBERONE addresses quality assurance through their individual hand testing process and service guarantee.

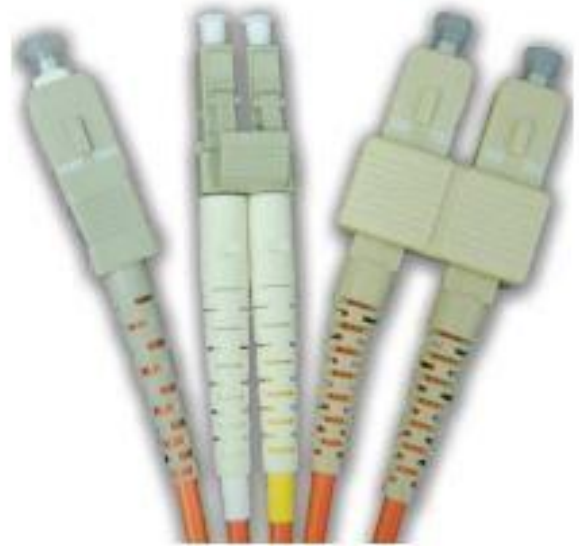

### Features:

- Simplex or Duplex
- Standard or Custom Lengths
- Connector & PVC Jacket Options
- PC Polish
- Riser Rated or Plenum
- 100% Tested & Guaranteed

### Specifications:

Connector Types	SC	LC	FC	ST
Insertion Loss (dB)	Max. 0.40	Max. 0.40	Max. 0.40	Max. 0.40
Reflectance – PC Polish	- 25 dB	- 25 dB	- 25 dB	- 25 dB
Fiber / Cable Type	Corning® InfiniCor Multimode Fiber / Riser or Plenum			
PVC Jacket Thickness	1.6, 2 or 3 mm Diameter			
Operating Temperature	- 20 to 60 °C			
Color	Orange			
Core Size	62.5 um			
Data Rate	1 GB @ 850 um			
Distance	Up to 300 meters			
Applications	Short-Haul Networks, Local Area Networks (LANs) & Private Networks			